


11th CIMAC CASCADES in Wuxi, China

The latest technologies of J-ENG's UE Engine, toward higher efficiency


October 11 2019

Japan Engine Corporation
Hideo Okamura

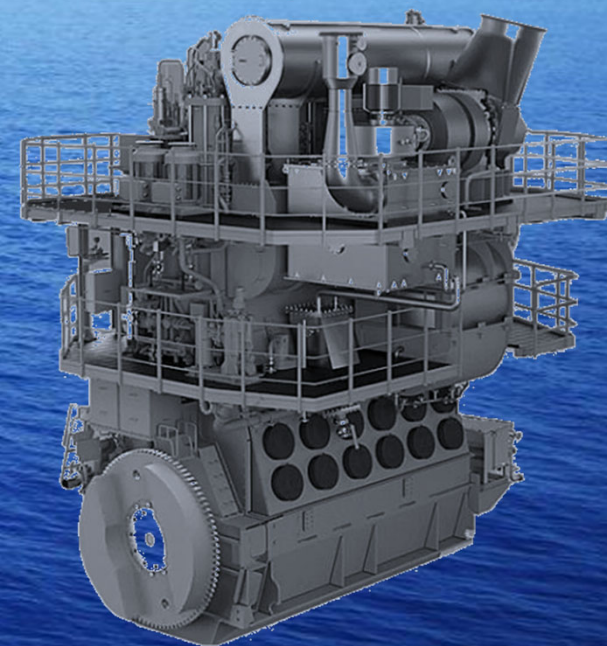

CONTENTS

- 1 Overview of Japan Engine Corporation and UE engine
- 2 Development concept
- 3 Principle structure and advantages
- 4 Conclusion

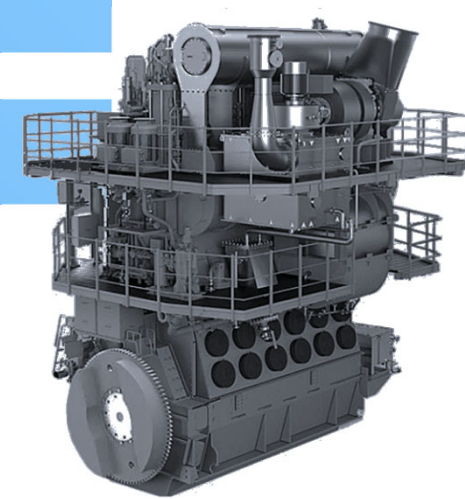


CONTENTS

1 Overview of Japan Engine Corporation and UE engine


2 Development concept

3 Principle structure and advantages

4 Conclusion

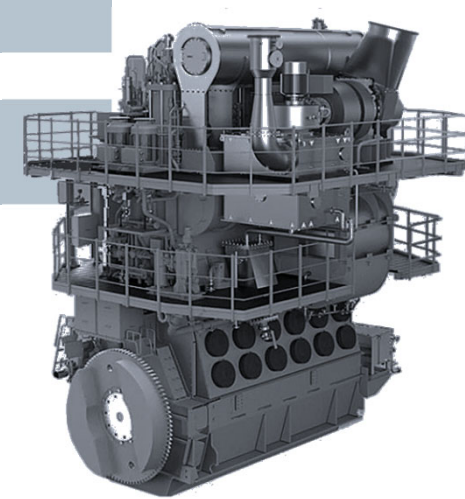

Company profile

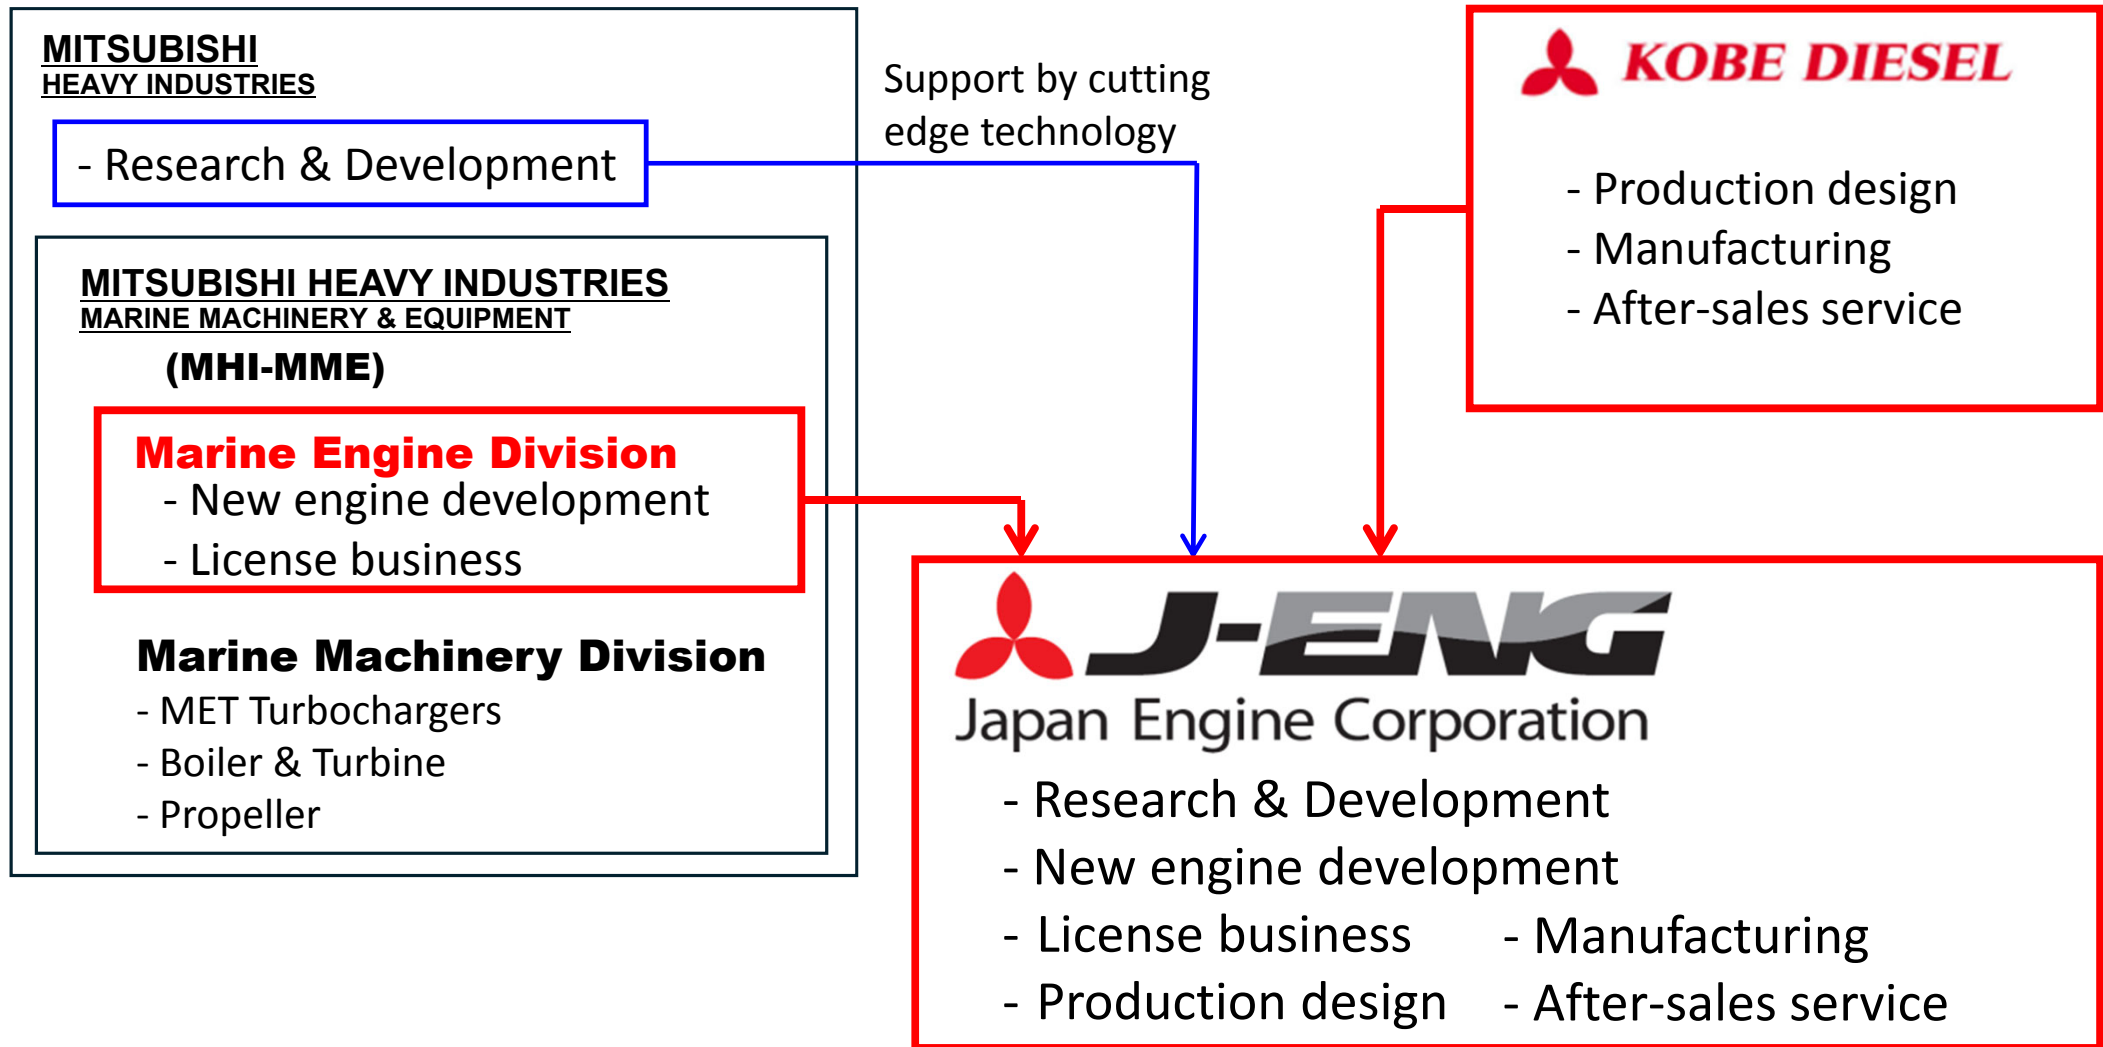

Naming rule

e.g. **6 UEC 42 LSH - Eco - D 3 - EGR**

Tier III technology:

(blank) Tier II
EGR: Low Pressure EGR
SCR: Low Pressure SCR

Version number:

1: Standard version
2: Low-SFOC version
3: Extra Low-SFOC version(UEC50LSH-Eco)

BMEP number:

A: 20bar B: 21bar C: 22bar or 22.5bar
D: 24bar
(blank): less than 20bar


Eco: Electronically controlled engine
(blank): Camshaft controlled engine

Development code: LSII, LSE, LSH,LSJ (MGO mono-fuel engine)


Bore size in cm

Brand name: U: uniflow scavenging
E: Exhaust gas turbocharged
C: Crosshead type

Number of cylinders:

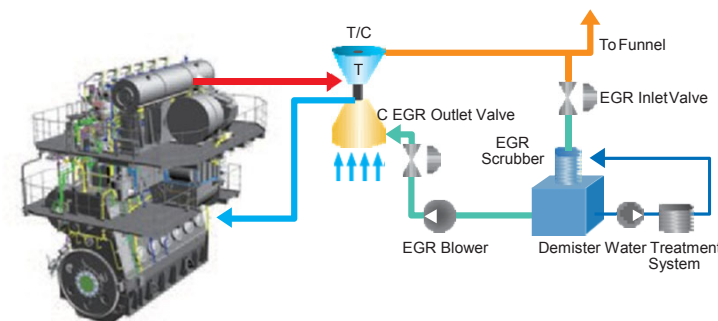

Low pressure EGR system

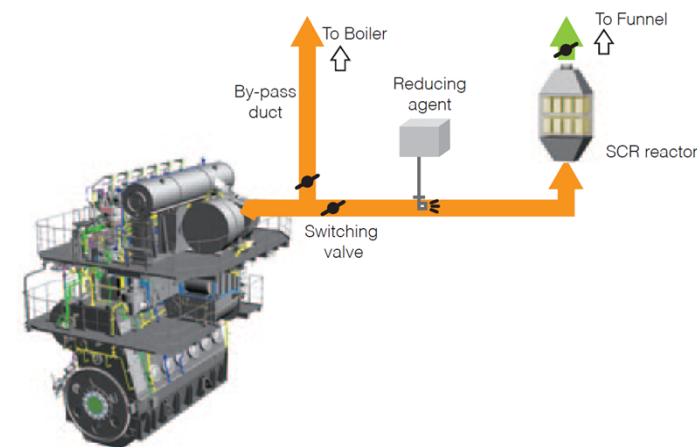

Low pressure SCR system

Developing history of UE engine



8UEC60LSII-Eco



6UEC50LSE



6UEC35LSE-Eco



6UEC50LSH-Eco



5UEC50LSJ

35LSJ

50LSJ

42LSJ

42LSH-Eco

50LSH-Eco

33LSE

80LSE-Eco

35LSE

Eco

45LSE

Eco

50LSE

Eco

60LSE

Eco

68LSE

52LSE

Eco

LSII Type

Eco

L/LA/LS Type

H/HA Type

A/B/C/D/E Type

Eco: Electronically controlled engine

Development technologies accumulated over 60 years

1955

1950 1960 1970 1980 1985 1990 1995 2000 2005 2010 2015 2020

UE Engine Production Records of LSII / LSE / LSH


As of Aug, 2019

Engine type	Ordered	Delivered	1st set in service
85 LSC	7	7	1993.12
85 LSII	50	50	1992. 7
75 LSII	20	20	1988. 4
60 LSII	201	201	1995. 8
50 LSII	243	243	1994. 2
43 LSII	26	26	2004. 6
37 LSII	19	19	2000. 9
33 LSII	139	124	1994. 6
80 LSE	2	2	2013. 6
68 LSE	15	15	2003. 5
60 LSE	35	32	2008. 6
52 LSE	30	30	2001. 9
50 LSE	18	18	2007. 2
45 LSE	262	251	2008.12
35 LSE	14	7	2014. 6
33 LSE	34	29	2014.12
50 LSH	41	21	2015. 8
Total	1156	1095	-

***UEC42LSH is the successor of UEC45LSE,
and developed by using proven UEC50LSH technologies.***


CONTENTS

- 1 Overview of Japan Engine Corporation and UE engine
- 2 Development concept
- 3 Principle structure and advantages
- 4 Conclusion

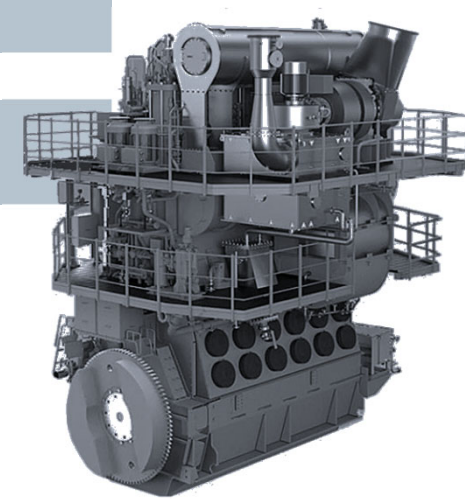


UEC42LSH-Eco Development concept

- **“UEC42LSH”** is a successor to UEC45LSE engine, which is the UE’s best seller engine ordered over 260 sets so far.
- Based on comprehensive market research, the optimal rating is set for Handysize BC, Small CT, etc. for the domestic and overseas shipyards. Especially for Handysize BC’s rating field, 6UEC42LSH , which has an advantage in terms of vibration, can be applied comparing to 5cyl. (50cm bore) engine.
- **UEC42LSH-Eco-D3** can achieve the lowest SFOC in the world.
- Long time slow steaming can be easily operated. (Continuous operation is possible down to 20% load without any load up)
- Compact engine size and weight.
- Promote the digitalization in future.
- MGO mono-fuel engine **“UEC42LSJ”** also joins in the UE’s lineup.

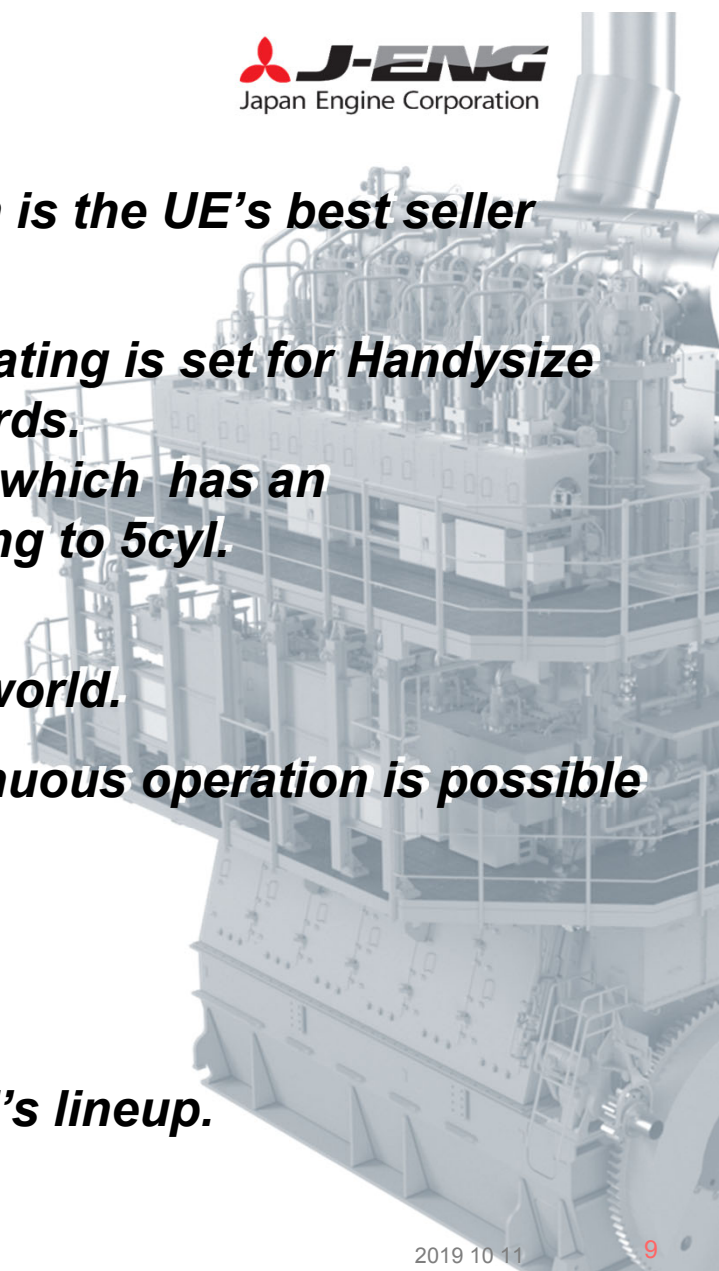

UEC42LSH-Eco Rating Field

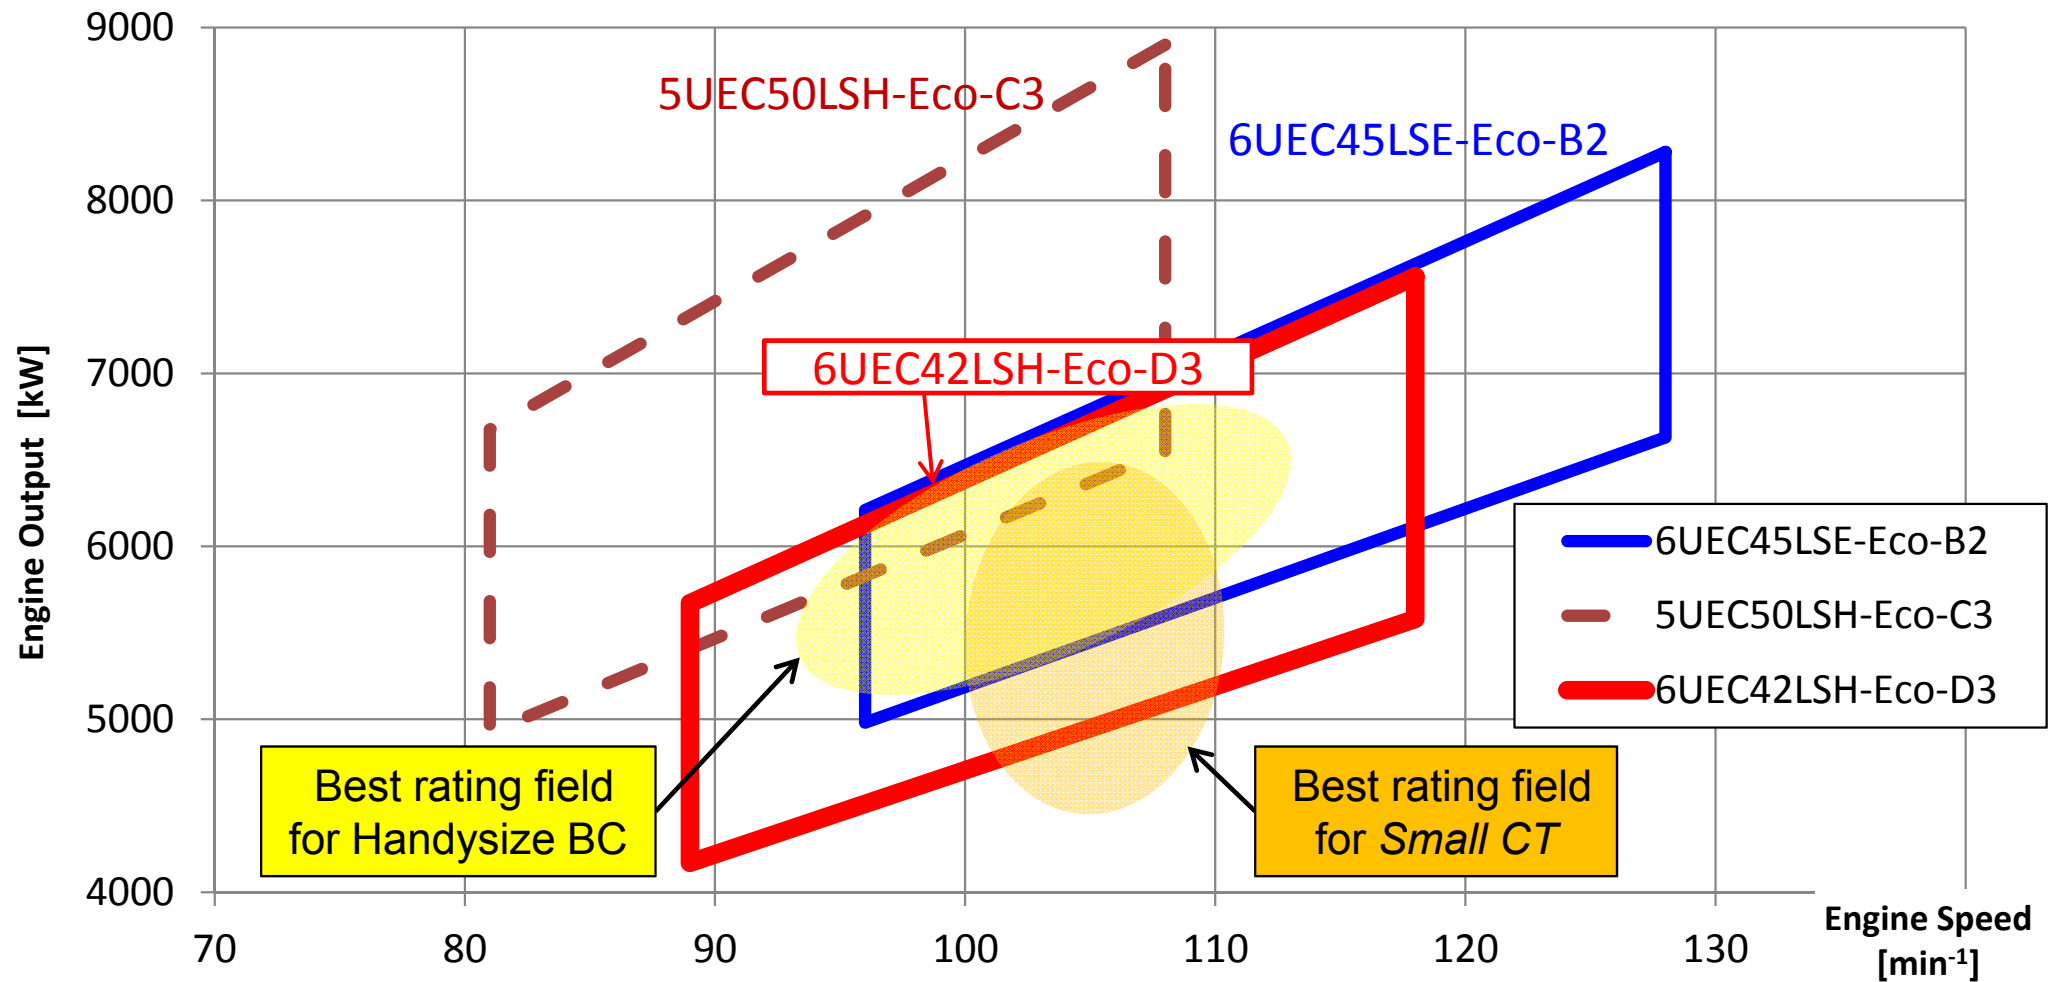

UEC42LSH-Eco Main Particulars


Model		6UEC42LSH-Eco-D3	6UEC45LSE-Eco-B2	5UEC50LSH-Eco-C3
Bore	[mm]	420	450	500
Stroke	[mm]	1,930	1,930	2,300
Stroke/Bore	—	4.6	4.3	4.6
Output	[kW]	7,560	8,280	8,900
Engine speed	[rpm]	118	128	108
Pme	[bar]	24.0	21.1	21.9
Piston speed	[m/s]	7.6	8.2	8.3
SFOC @100%Load				
Tier2 Mode	[g/kWh]	164	169	164
Tier3 Mode	[g/kWh]	165.6 (LP-EGR)	170.7 (LP-EGR)	165.6 (LP-EGR)

-3.0%

The lowest SFOC engine in the world

UEC42LSH-Eco Comparison of Fuel oil consumption

Comparison rating point: 5,430kW x 105rpm (TierII Mode)

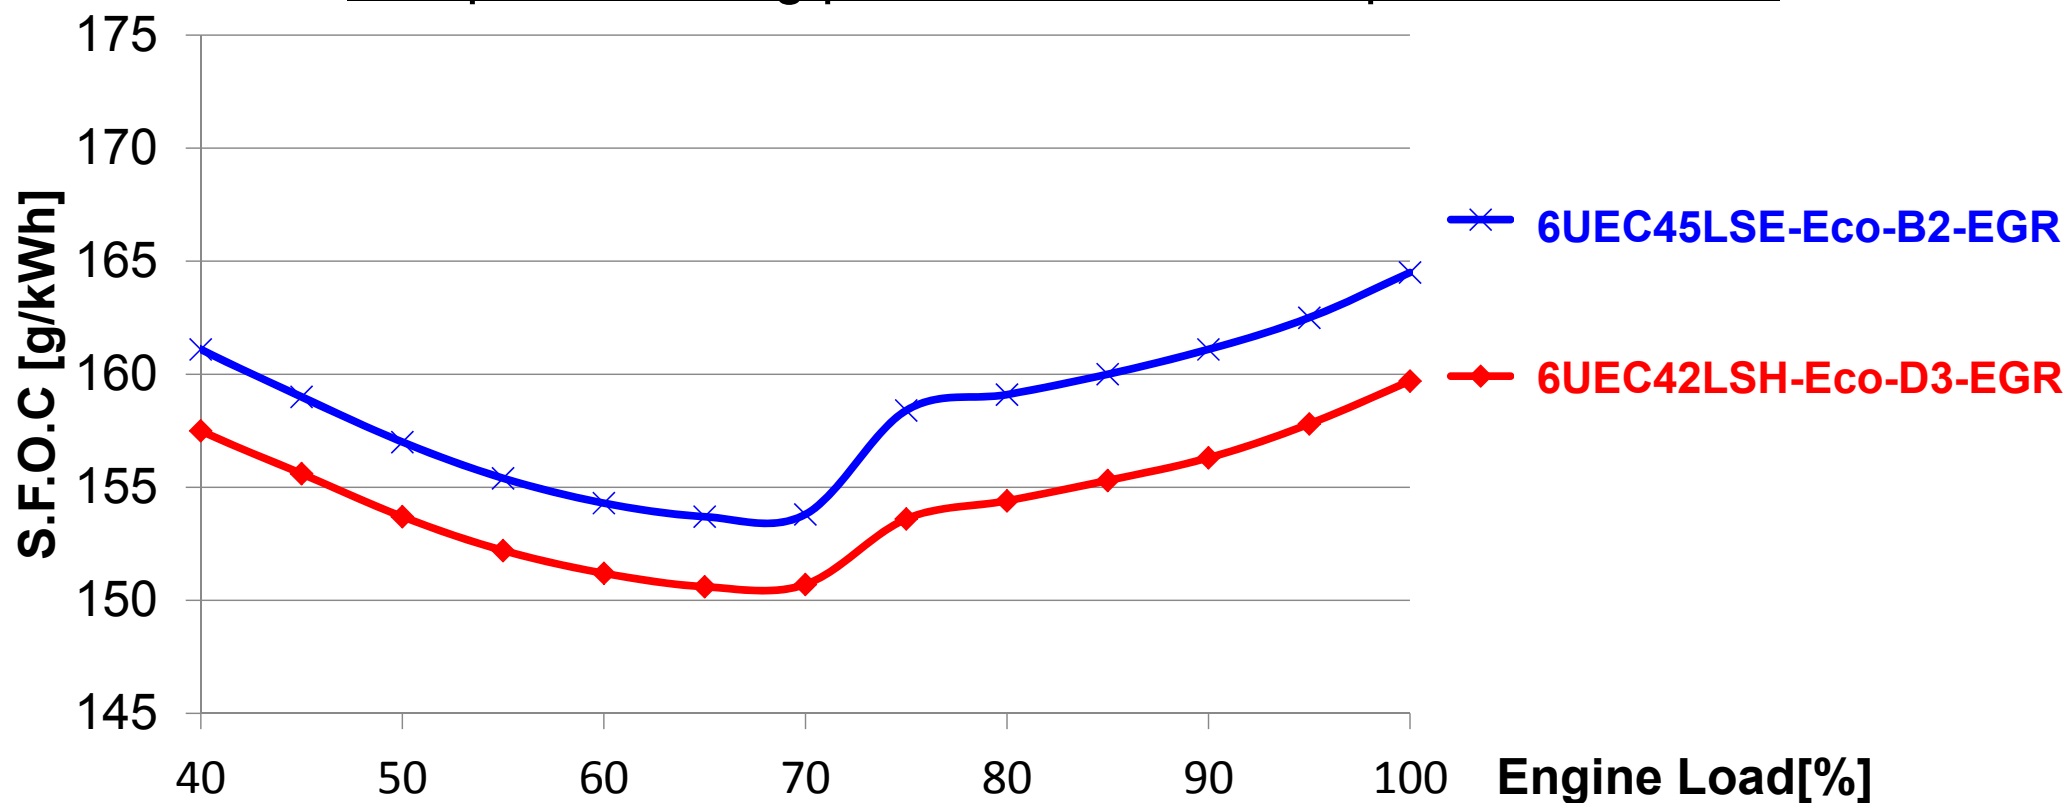

6UEC42LSH-Eco-D3 can achieve much lower fuel oil consumption.


UEC42LSH-Eco Comparison of Dimensions

Model	6UEC42LSH-Eco-D3	6UEC45LSE-Eco-B2	5UEC50LSH-Eco-C3
Engine length (Catalogue figure) [mm]	5,646 (Lcc760)	5,894 (Lcc792)	5,560 (Lcc870)
Piston overhaul [mm]	8,850 (St1930)	8,860 (St1930)	10,050 (St2300)
Crank shaft center [mm]	1,000	1,000	1,190
Bedplate width [mm]	2,800	3,000	3,350
Weight (without EGR) [ton]	170	187	194


Compact engine size and weight

UEC42LSH-Eco Comparison of Dimensions

UEC42LSH-Eco

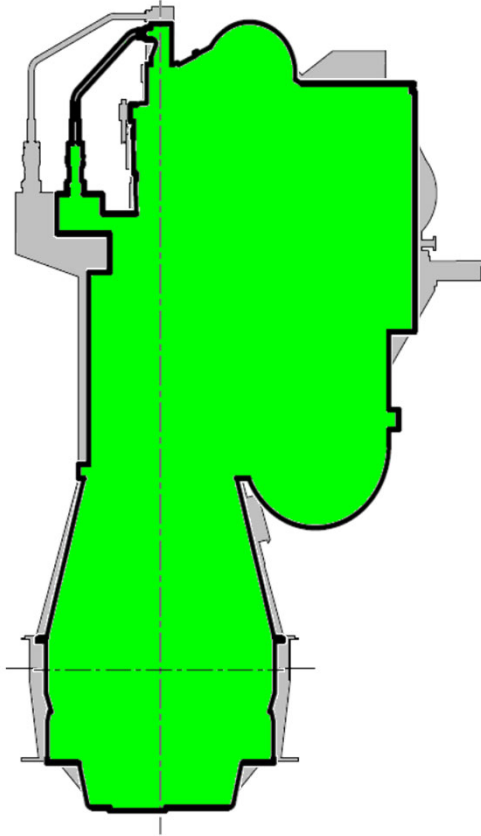


UEC45LSE-Eco

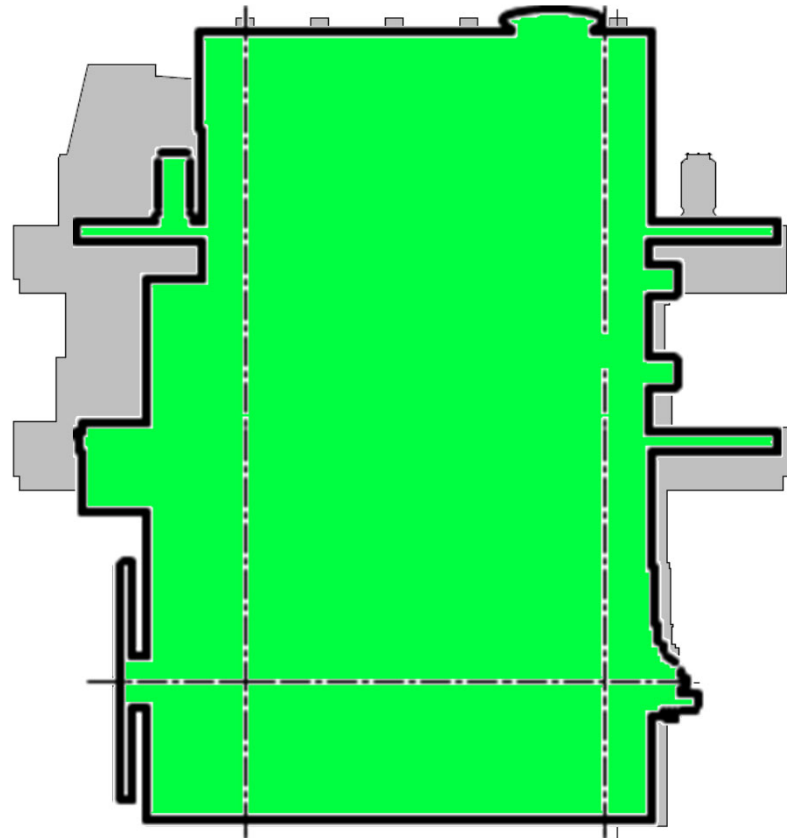

UEC42LSH can achieve downsizing from UEC45LSE

CONTENTS


- 1 Overview of Japan Engine Corporation and UE engine
- 2 Development concept
- 3 Principle structure and advantages
- 4 Conclusion

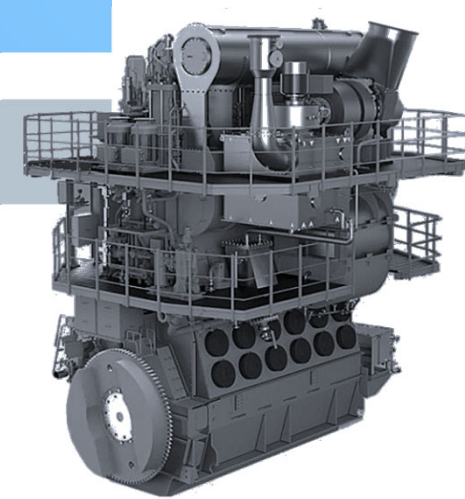

UEC42LSH-Eco Principle structure and advantages

Design process

-Utilization of MBD (Model Based Development)

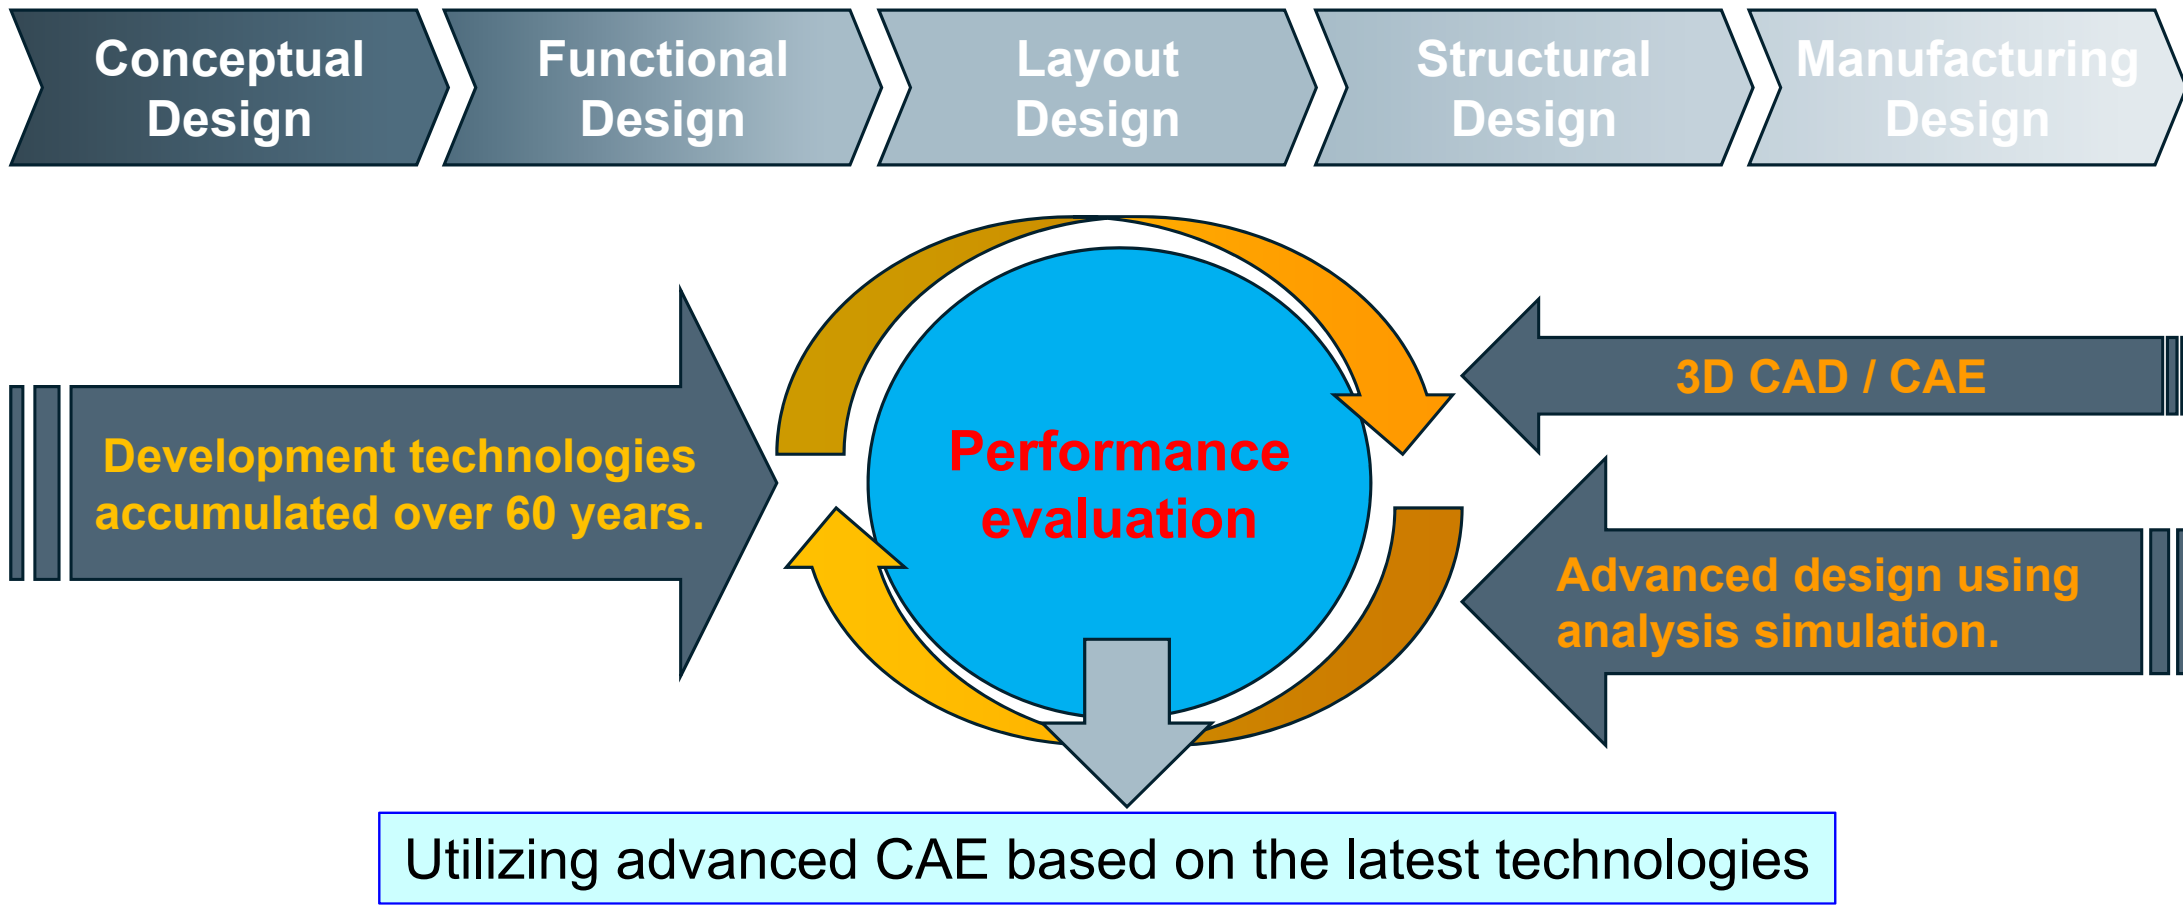

UEC42LSH-Eco Principle structure and advantages

Main structure

-Compact size, light weight, less deformation

Cylinder jacket


- High stiffness by appropriate configuration and material change (applying **FCD**)
⇒ Higher reliability (Piston running behavior)

Bedplate & column


- High stiffness by single separate wall ⇒ Higher reliability
- Reduce deformation of column sliding plate by appropriate configuration
⇒ Higher reliability (Piston running behavior)

Tie rod


- High stiffness by twin stay tie bolt with low alloy steel
- Reduce deformation of main bearing girder
⇒ Higher reliability

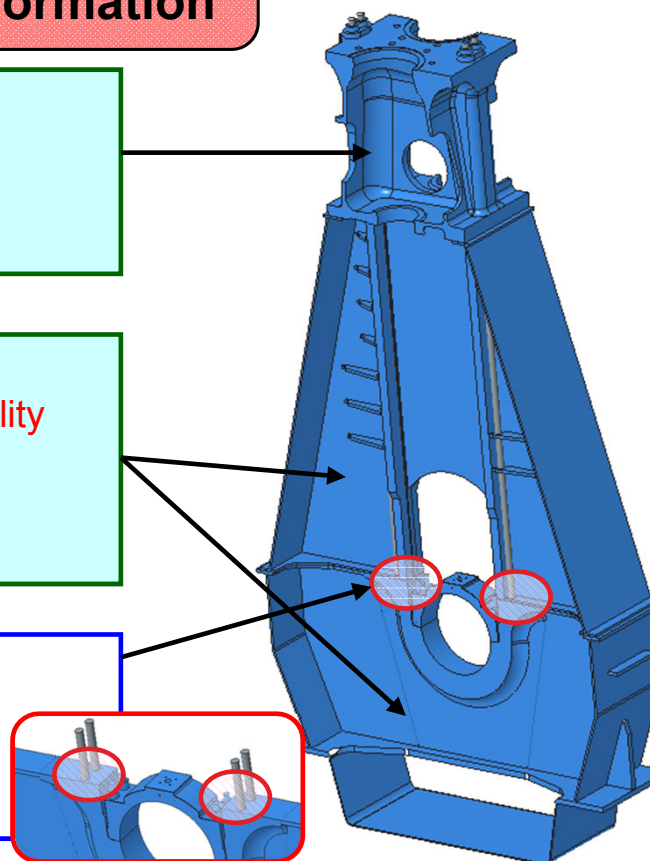

FEM model

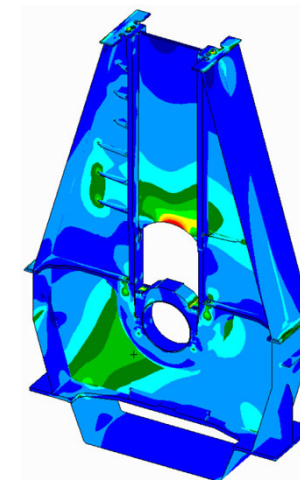

EHL* analysis



*EHL : Elastohydrodynamic Lubrication

➤ Stiffness and weight of these structures are optimized by **FEM** and **EHL** analysis.

UEC42LSH-Eco Principle structure and advantages

Moving parts

-Compact size, light weight

Crosshead


- Lower mechanical loss due to high rigidity and appropriate surface press. of guide shoe
⇒ Higher reliability, **Lower FOC**

Crosshead bearing

- Lower oil film press. by applying pocket type without center oil groove, Higher fatigue strength by **aluminum metal** ⇒ Higher reliability, **Compact size**

Main bearing & crankpin bearing

- Higher fatigue strength by **aluminum metal**
⇒ High reliability, **Compact size**

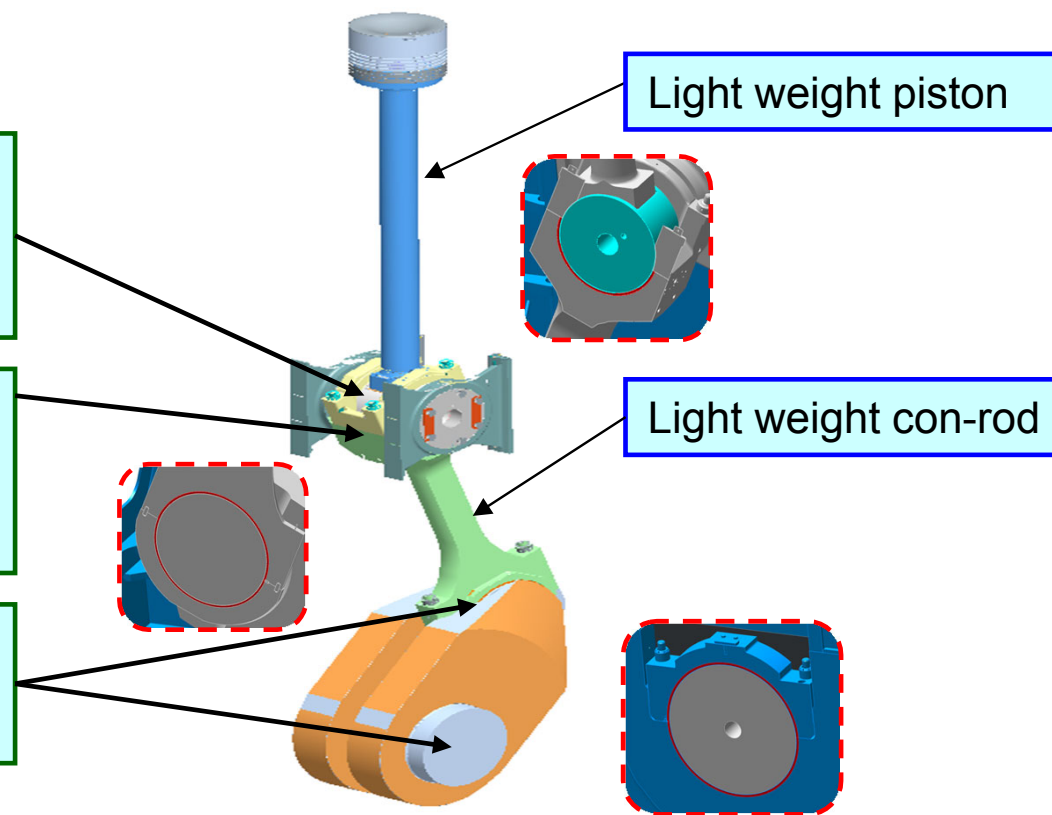


- Achieve **lower fuel oil consumption** by optimization of moving parts weight and reduction of **mechanical loss**.

UEC42LSH-Eco Principle structure and advantages

Combustion chamber

-Reduction of thermal load, thermal stress

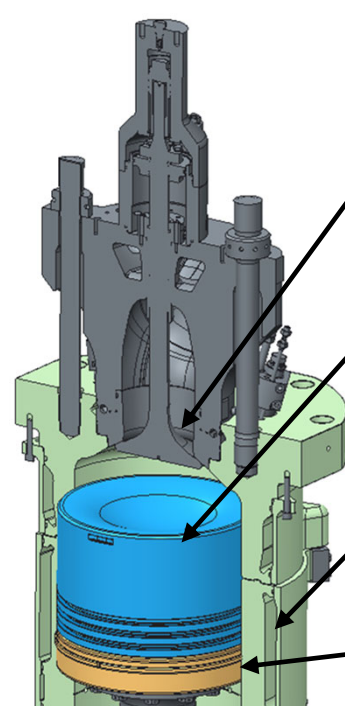

Nimonic Exh. valve

High heat resistant alloy, **Nimonic** or DSA760 as standard

Piston

- Bore cooling type and high top land.
Lower temperature by increase cooling capacity
Reduce influence by combustion gas

Cylinder liner



- Liner temp. control by insulation band and loop cooling
- Lower **mechanical loss** by plateau honing
⇒ Better slow steaming operation, **Lower FOC**

Cylinder lubricating system



- Appropriate lubricating by A-ECL*

➤ The strength and heat condition of combustion chamber are analyzed by **FEM** and **Thermal analysis**.

FEM model

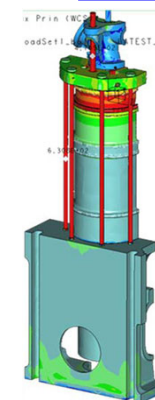

Thermal analysis

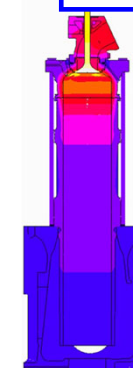

*A-ECL :
Advanced Electronically
Controlled Lubricating system

2019 10 11

UEC42LSH-Eco Principle structure and advantages

Eco system

-Development by J-ENG own technologies = “No Black Box”

Cylinder control unit

- Accumulating block
- Fuel injection pump
- Exhaust valve lower part
- Solenoid valve unit
 - Solenoid valve
 - Valve plate
 - Main valve

Control unit


- Engine control unit (ECU)
- Power distribution unit (PWD)
- Local control unit (LCB)
- Multi IO unit (MIO)
- Driver unit (DRV)

Electric driven pump
(for hyd. oil)

Engine driven pump
(for hyd. oil)


Solenoid valve

FO. side: 2 Solenoid valves

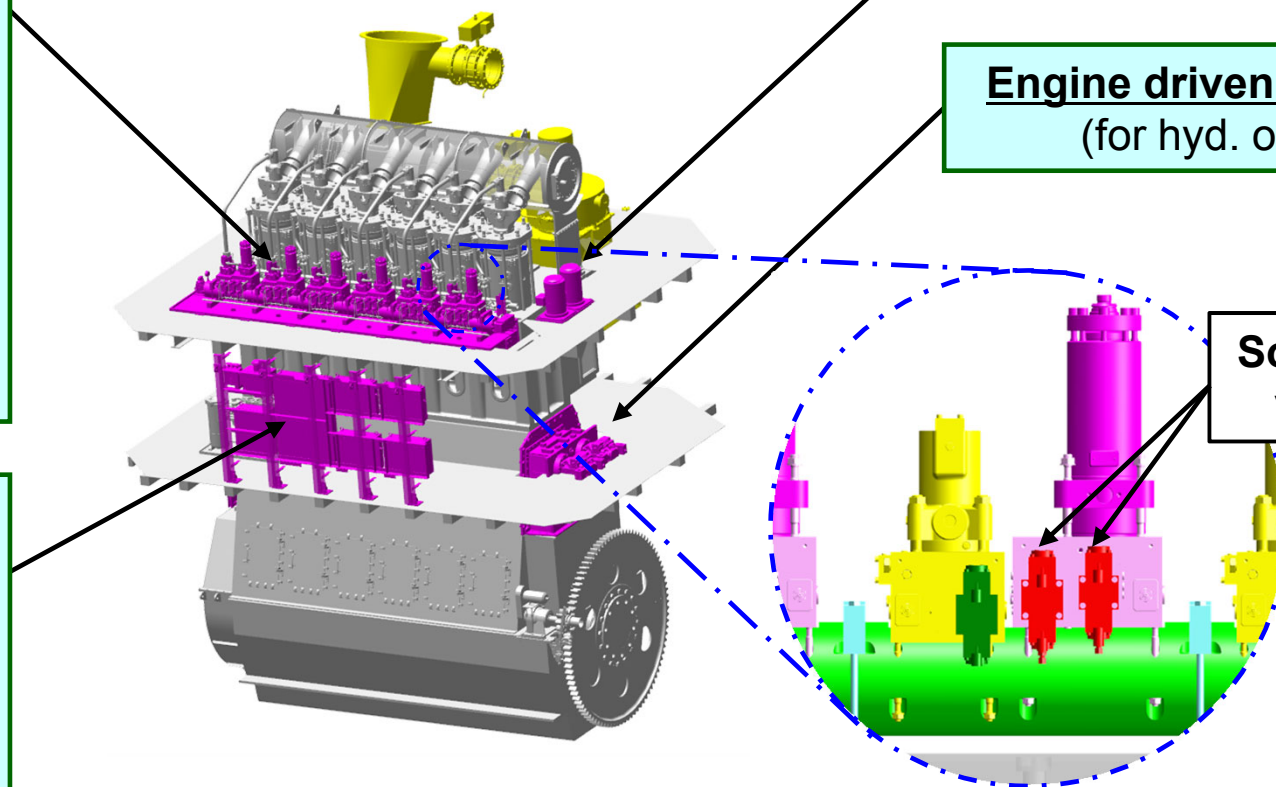

UEC42LSH-Eco Fuel injection rate control

Eco system

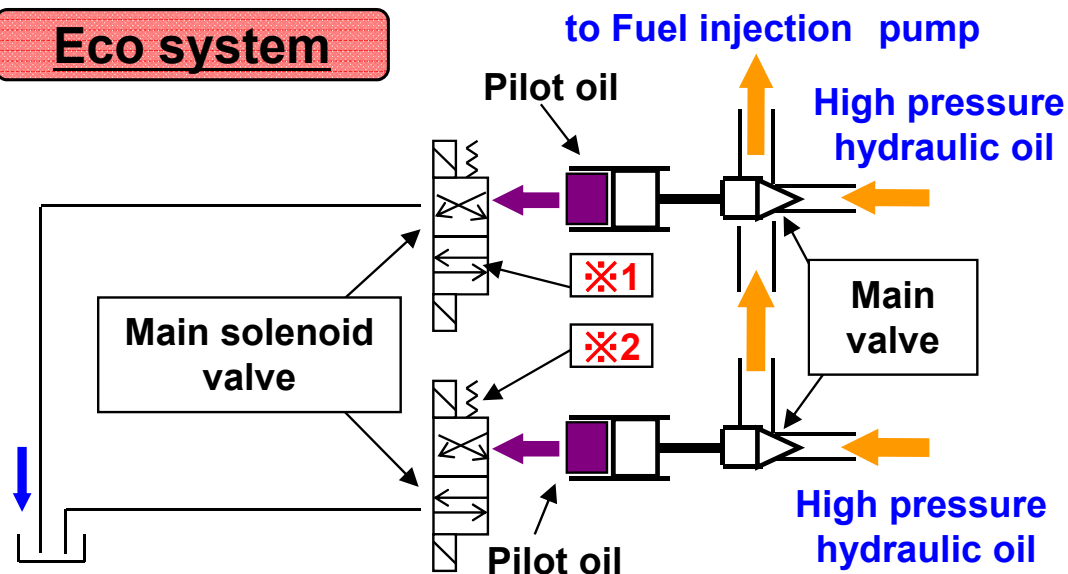



[Control mechanism]

- Fuel injection rate is controlled by differences of main valve's lift and opening timing
- Main valve's opening timing is controlled by each S/V




Controlled fuel injection rate contributes to improve the trade-off relationship of NOx emission and FOC.

Concept of fuel injection mode

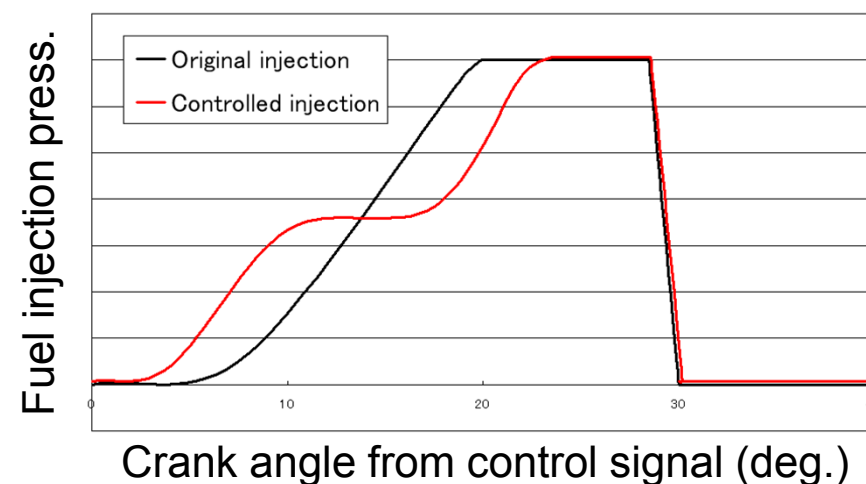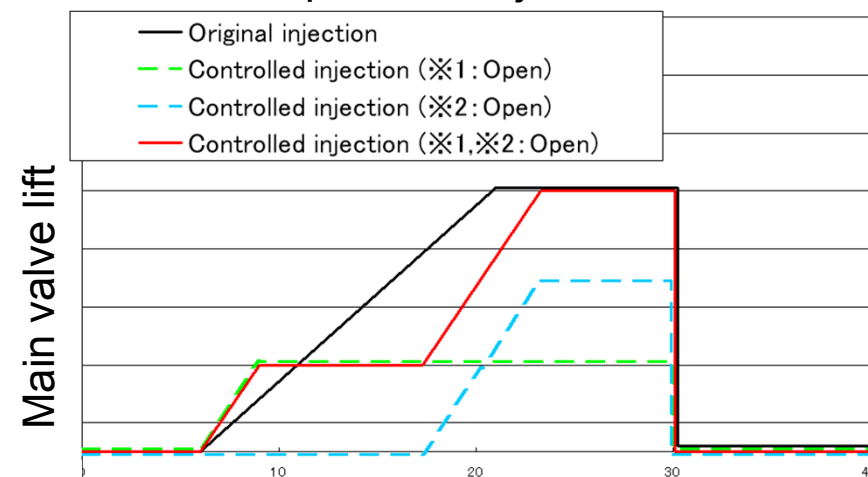

UEC42LSH-Eco Principle structure and advantages


Exhaust Gas and Scavenge System

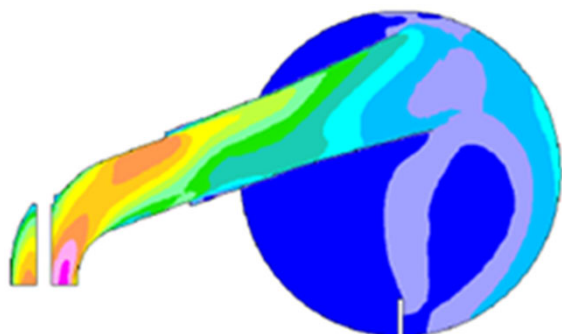

CFD analysis

CFD: Computational Fluid Dynamics

Achieve **lower fuel oil consumption** thanks to reduction of pressure loss by optimization for scavenging air and exhaust gas passage.

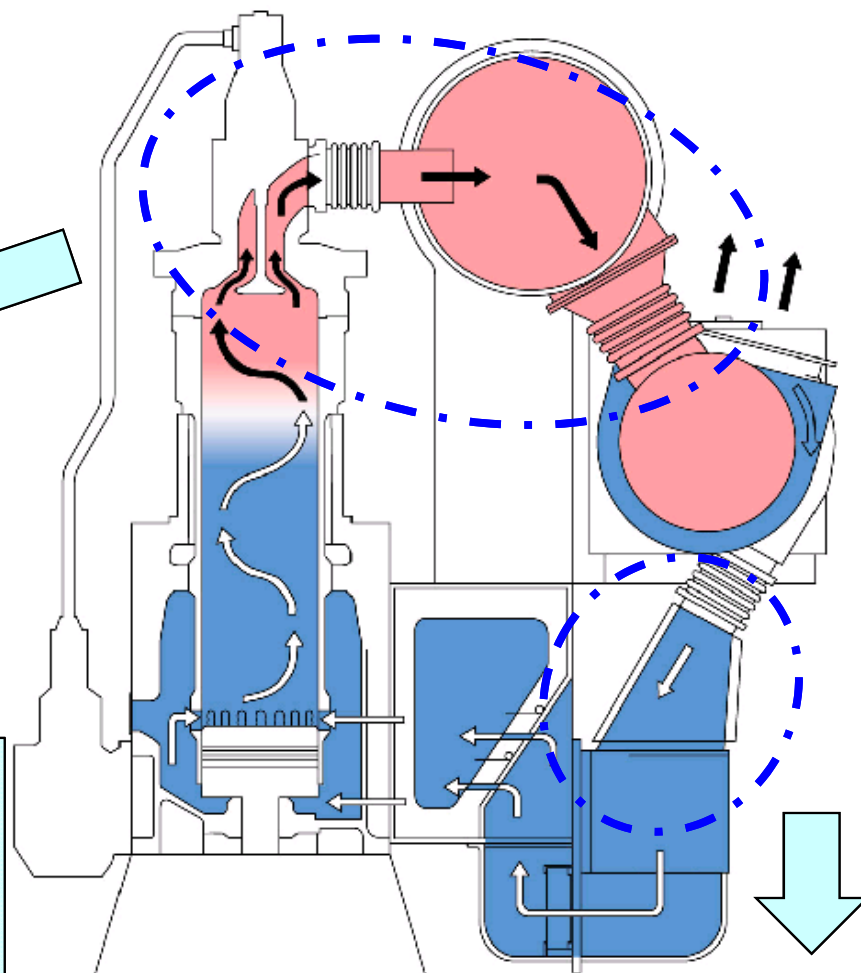

CFD analysis for
scavenging passage

Application of “JUMP” technology

Concept of JUMP

J-ENG Unique Marine Power




Solution to three environmental issues of NOx, SOx, EEDI(CO₂) simultaneously

- ◆ Insert water in fuel injection valve during standstill period of injection at each cycle
- ◆ Fuel and water can be injected by layers according to actuation of fuel pump

UEC-LSJ

-Environmental impact reduction engine

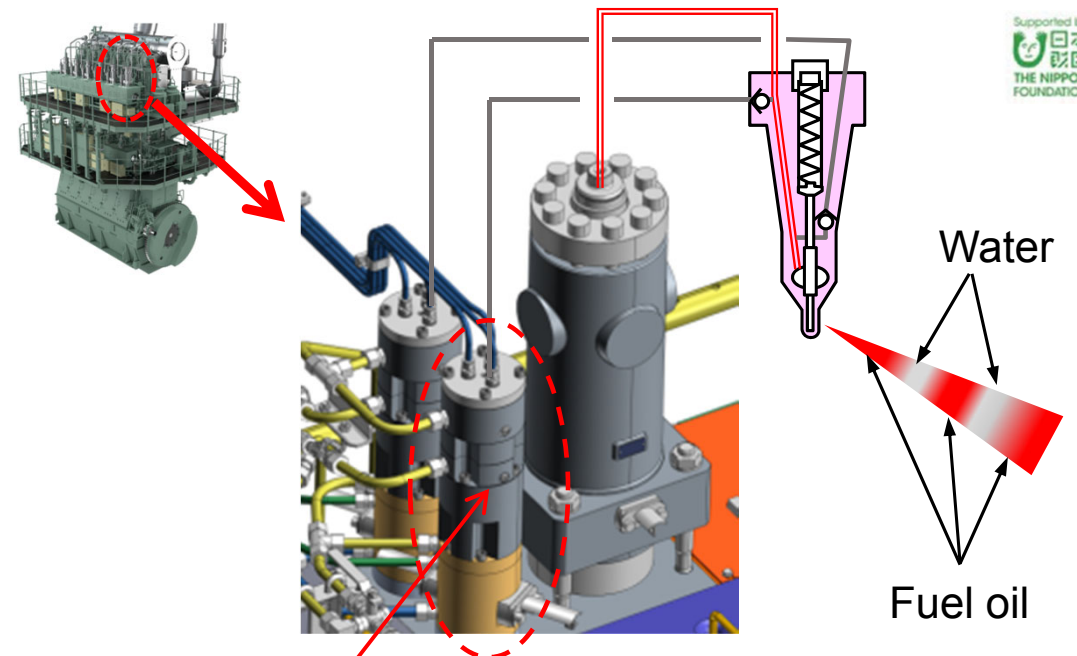

Water Injection pump

Schematic diagram of water injection system


Environmental impact reduction engine “UEC-LSJ”

Technical features of “UEC-LSJ”

Realize **low FOC** meeting with NOx regulations by **comprehensive UE engine technology** and mixture of **existing technology**


- ❑ Ultimate low FOC
 - **Combustion tuning** to prioritize low FOC
- ❑ Reduction of NOx
 - Application of **water injection** system

- ❑ Compliance with Tier3 LP-EGR or LP-SCR

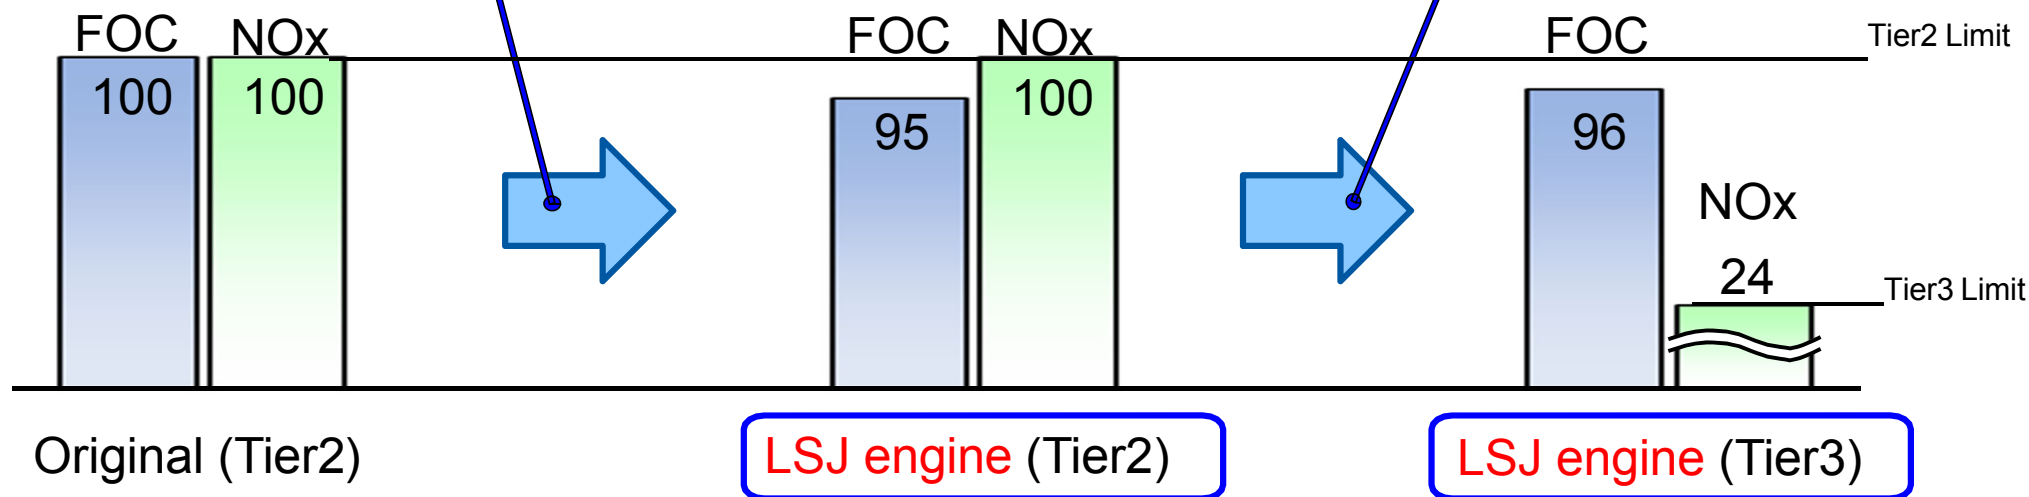


CONTENTS

- 1 Overview of Japan Engine Corporation and UE engine
- 2 Development concept
- 3 Principle structure and advantages
- 4 Conclusion

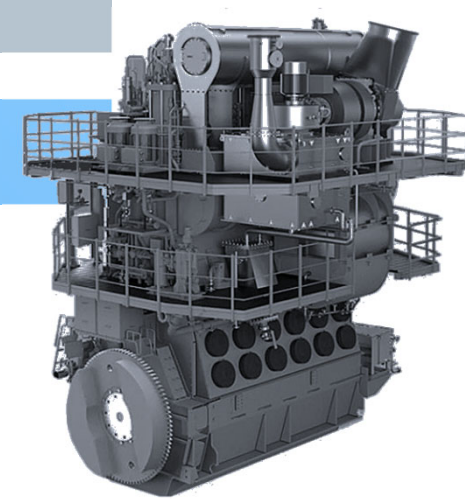

UEC42LSH-Eco Conclusion

- The latest type of UE engine, **UEC42LSH-Eco**, is being developed to meet worldwide needs and will contribute to ship owners, ship operators and shipyards to cut operating costs and installation cost.
- **UEC42LSH-Eco** is being designed on the basis of well-proven conventional UE engines and with further improvements.
- Experiences of excellent operating condition of in-service engine will be fed back to new buildings.
- **UEC42LSH-Eco** is ready for complying with IMO-NOx Tier III regulation.
- The first “**UEC42LSH-Eco**” will be manufactured in December 2020 and tested and launched soon.

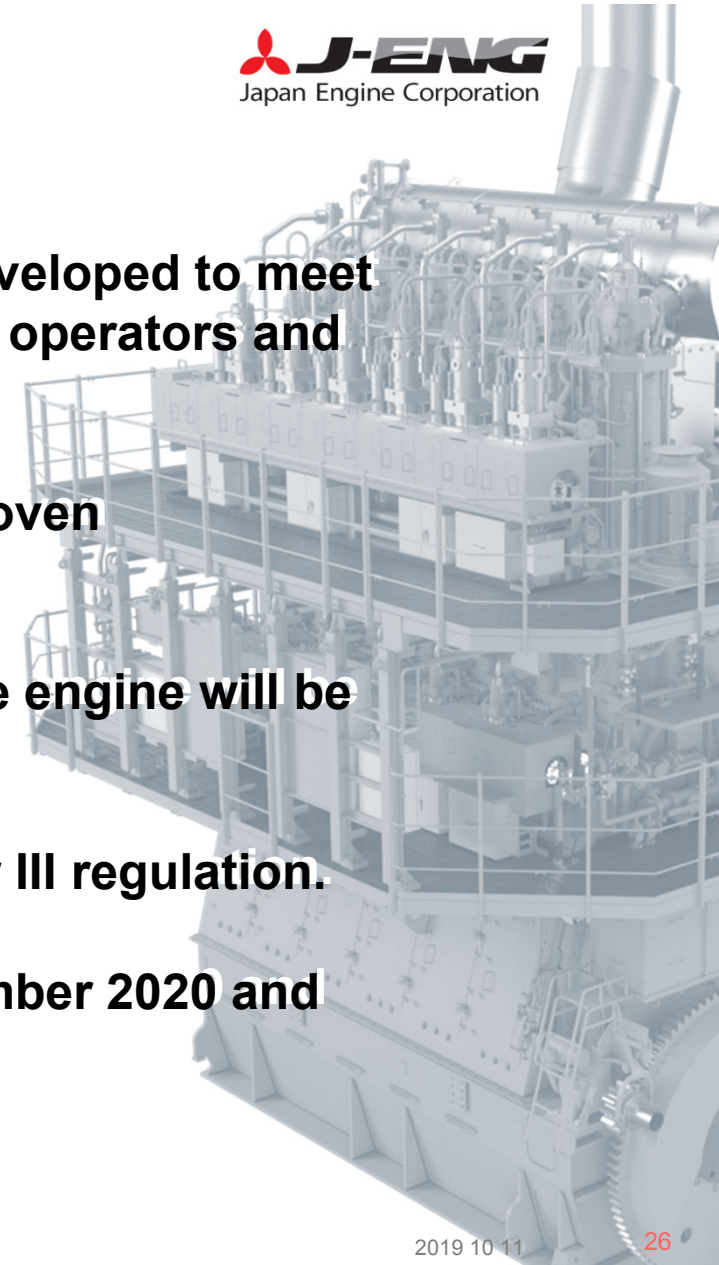

Thank you

Contact:

Hideo Okamura


Japan Engine Corporation

1-1, Wadasaki-Cho 1-Chome, Hyogo-ku, Kobe

Hyogo Pref., 652-8585, Japan

Hideo.okamura@j-eng.co.jp

<https://www.j-eng.co.jp/>



WMS-F854